


## Simply the best way to drive a valve!

In addition to electric actuators for air dampers, Belimo offer comprehensive range of valves and valve actuators for controlled devices in HVAC Systems.



The space-saving QCV (Quick Compact Valve) from the Belimo ZoneTight™ product range sets new standards for room and zone solutions. It is now available as a 2-way characterised control valve with a nominal diameter of DN 20 and also as a 3-way change-over ball valve with DN 15 and DN 20 nominal diameters. These valves are robust, flexible and tight-sealing.

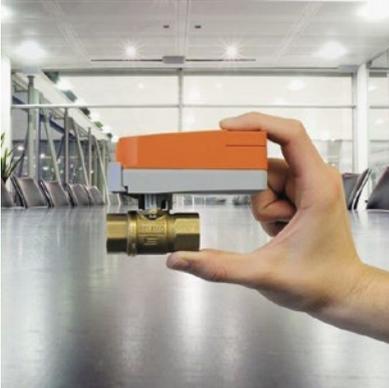

The new PIQCV (Pressure Independent Quick Compact Valve) from the Belimo ZoneTight™ product range uses automatic and permanent hydraulic balancing to supply the precise amount of water required at all times to all of the heating and cooling elements, providing ideal room comfort. These valves are compact, flexible and efficient.



The revolutionary Retrofit Globe Valve Actuator is equipped with a universal neck and valve stem adaptor, suitable for use with most valves. Belimo has now developed a Retrofit App which determines the suitable actuator using different parameters. It can be used everywhere - on site or in the office.

### The Multi-functional Belimo Energy Valve™

#### One optimised complete solution - Now cloud based.

The Belimo Energy Valve™ is an Internet of Things (IoT) device – a smart connected pressure-independent valve that measures and manages coil energy consumption by utilising an embedded flow meter, along with supply and return water temperature sensors. The Belimo Energy Valve™ also has power control and Delta-T manager logics built in, that monitors coil performance and optimises the heat transfer of the coil by maintaining the Delta-T.



In addition to the already proven 2-way butterfly valve, Belimo is now offering the even more flexible 3-way butterfly valve. In combination with the new PR actuators they are the most intelligent, energy efficient and reliable high flow solution in the HVAC market. Belimo butterfly valves can be used universally as tight closing 2-way & 3-way valves for open-close, change-over and control applications (as mixing & diverting valves). This flexibility is guaranteed by the energy-efficient and multifunctional PR actuators. IP66/67 protection allows outdoor usage.

### Belimo Automation UK Limited

Shepperton Business Park, Govett Avenue, Shepperton, Middlesex, TW17 8BA  
Tel. 01932 260460, Fax. 01932 269222, Email. sales@belimo.co.uk Web. www.belimo.co.uk